

# ultra

---

## First Choice for Any Application

When it comes to meeting the highest hygiene standards, water and energy-saving requirements, and ensuring safety against vandalism, our ultra series is the best faucet choice.

With its multitude of designs, ultra meets any requirement in terms of

size, function, power supply, etc. for any environment, including public restrooms and washrooms in commercial establishments.

The trend-setting concept combines quality, sustainability, and reliability at an extremely attractive price-performance |



## Trend-setting

ultra offers the maximum level of comfort and safety via intelligent, well-engineered technology. It sets new standards in terms of water and

energy consumption. Innovative hygiene functions make the faucet the perfect solution for any environment or application.



**Sustainability**  
Ultimate water saving and energy efficiency based on sophisticated technology. Years of trouble-free operation due to high-quality materials and components.



**Hygiene**  
Protection against bacteria transfer due to hands-free operation. Prevention of germ build-up through the use of bacteriostatic materials and hygienic rinsing.



**OneTool-Service**  
A single Allen key is all one needs to open the faucet. Afterwards, tool-free servicing can be carried out in seconds via connector-free plug and play.



**Modular Design**  
An individual, tailor-made faucet for any environment and application, because of the intelligent modular design concept.



**Pioneering Energy Options**  
Extension of battery life up to eight years using solar power generated from natural and artificial light or by generating electricity from the integrated, water-driven turbine.



**Features**

- TwistStop: Shut-off valve inside faucet
- Adjustable scalding protection
- LED status display
- iqua-Touch for special functions and programming

# Sustainability

## Resource-efficient

The hands-free function reduces water use up to 70 % as water runs only when needed. This drastically reduces the amount of energy used to heat water as well. The optional solar module or the integrated turbine produces sufficient energy

to extend the battery life up to 8 years – a perfect water and energy saver.

High-quality materials and lead-free components ensure years of trouble-free operation.



### Water-saving

Low flow rates of 6 or even only 2 liters per minute thanks to a choice of aerators. Water flow delay time can be reduced, resulting in even lower water consumption.



### Energy-efficient

Extended lifetime with conventional alkaline cells up to 4 years and full utilisation of the battery capacity through innovative power management. Reduced energy consumption for water heating as water consumption is reduced up to 70 %.



### Solar

Up to 8 years of battery life with the optional solar module, which generates energy from natural and artificial light sources. Ideal for use in public areas.



### Turbine

Extension of the battery life to up to 8 years with the optional turbine module: A mini-power station generates electricity from the flowing water. The ideal solution for highly frequented areas.



### Boiler

Low energy requirement thanks to HCFS (Heater Control by Faucet Setting). Only the needed quantity of water is being heated.

# Hygiene

## ultra Sets New Hygiene Standards

Hands-free operation and clear, simple shapes provide improved hygiene in washing areas and of the faucet. Bacteriostatic materials and hygienic rinsing help prevent unwanted build-up of germs. Lead free and bacteria growth prevention water pipes meet all drinking water regulations. The model designed for the health sector

and industry allows hygienic hand washing up to the elbows thanks to its high spout. The unique hygiene mode for hospitals, medical practices and hygienic sensitive applications features a countdown timer to aid compliance with legal directives for handwashing times.



### Hygienic Operation

- Hands-free and safe operation
- Reliable water activation by the IR sensor above the tip of the spout
- Pre-selectable temperature (removable temperature adjustment lever)



### Clean Water

- Bacteriostatic materials
- Lead-free water channel
- Optional full stream laminar insert



### Hygienic Rinsing

- 12/24-hour automatic hygienic rinsing procedure can be activated
- Rinsing duration and interval are adjustable
- The required start time can be adjusted with the optional W-Combox



### Hygiene Mode (Expert Version)

Specially for the medical applications: The display counts down the full handwash duration. No extra stopwatch is necessary.



### Service-Monitor

Analysis and configuration of the operating data and functions saved in the faucet.

Valve-Module  
Solenoid with Filter



Battery Caddy  
with 4 alkaline  
batteries (AA)



Electronic-Module  
Public / Public Solar /  
Expert Solar



LED-Display  
Display of operating status

iqua-Touch  
for Programming and Parameterization



Filter  
Reserve/replacement filter



Exchange Tool  
To remove, clean and replace spray



Aerator  
Optional multi-laminar spray, full stream aerated or laminar

Securing Screw  
Captive to body

Integrated Side Mixer  
Removable for public areas



Reliability in public areas  
Airports / rest stops / train stations  
administrative buildings / military  
buildings / schools / universities



# Reliability

## Fail-safe and Robust

Well-engineered technology that has been proven and tested thousands of times as well as vandal-resistant components ensure years of reliable operation. If servicing is needed at any point, the one-tool required, modular design, and the fact that components can be accessed from above the sink make maintenance

extremely simple and convenient. Thanks to TwistStop there is no need to shut off the stop valve below the sink: Only twisting, turning already stops the water supply. All service work out exclusively above the sink. Operating states such as "Battery low" are well noticeable indicated by the LEDs on the side of the cover.



### OneTool Service

Only an Allen key is needed to open the faucet. All other activities without any tools.



### Modular Design

Service is carried out in seconds with just a few movements due to connectorless linking of the components. Conversion to another electronics module is possible at any time.



### LED-Control

Quick diagnosis of operating states:

- Battery low/empty display
- Valve function
- Help with programming via iqua-Touch




### Vandal-resistant

The robust shape, the hydraulic components integrated into the faucet, and the aerator ensure reliable operation and protection against vandalism.



### Communication Interface

- Integrated service, programming, and configuration interface
- Prepared for data transfer
- Export of all operation data
- Individual configuration of hygienic rinsing and water flow delay times

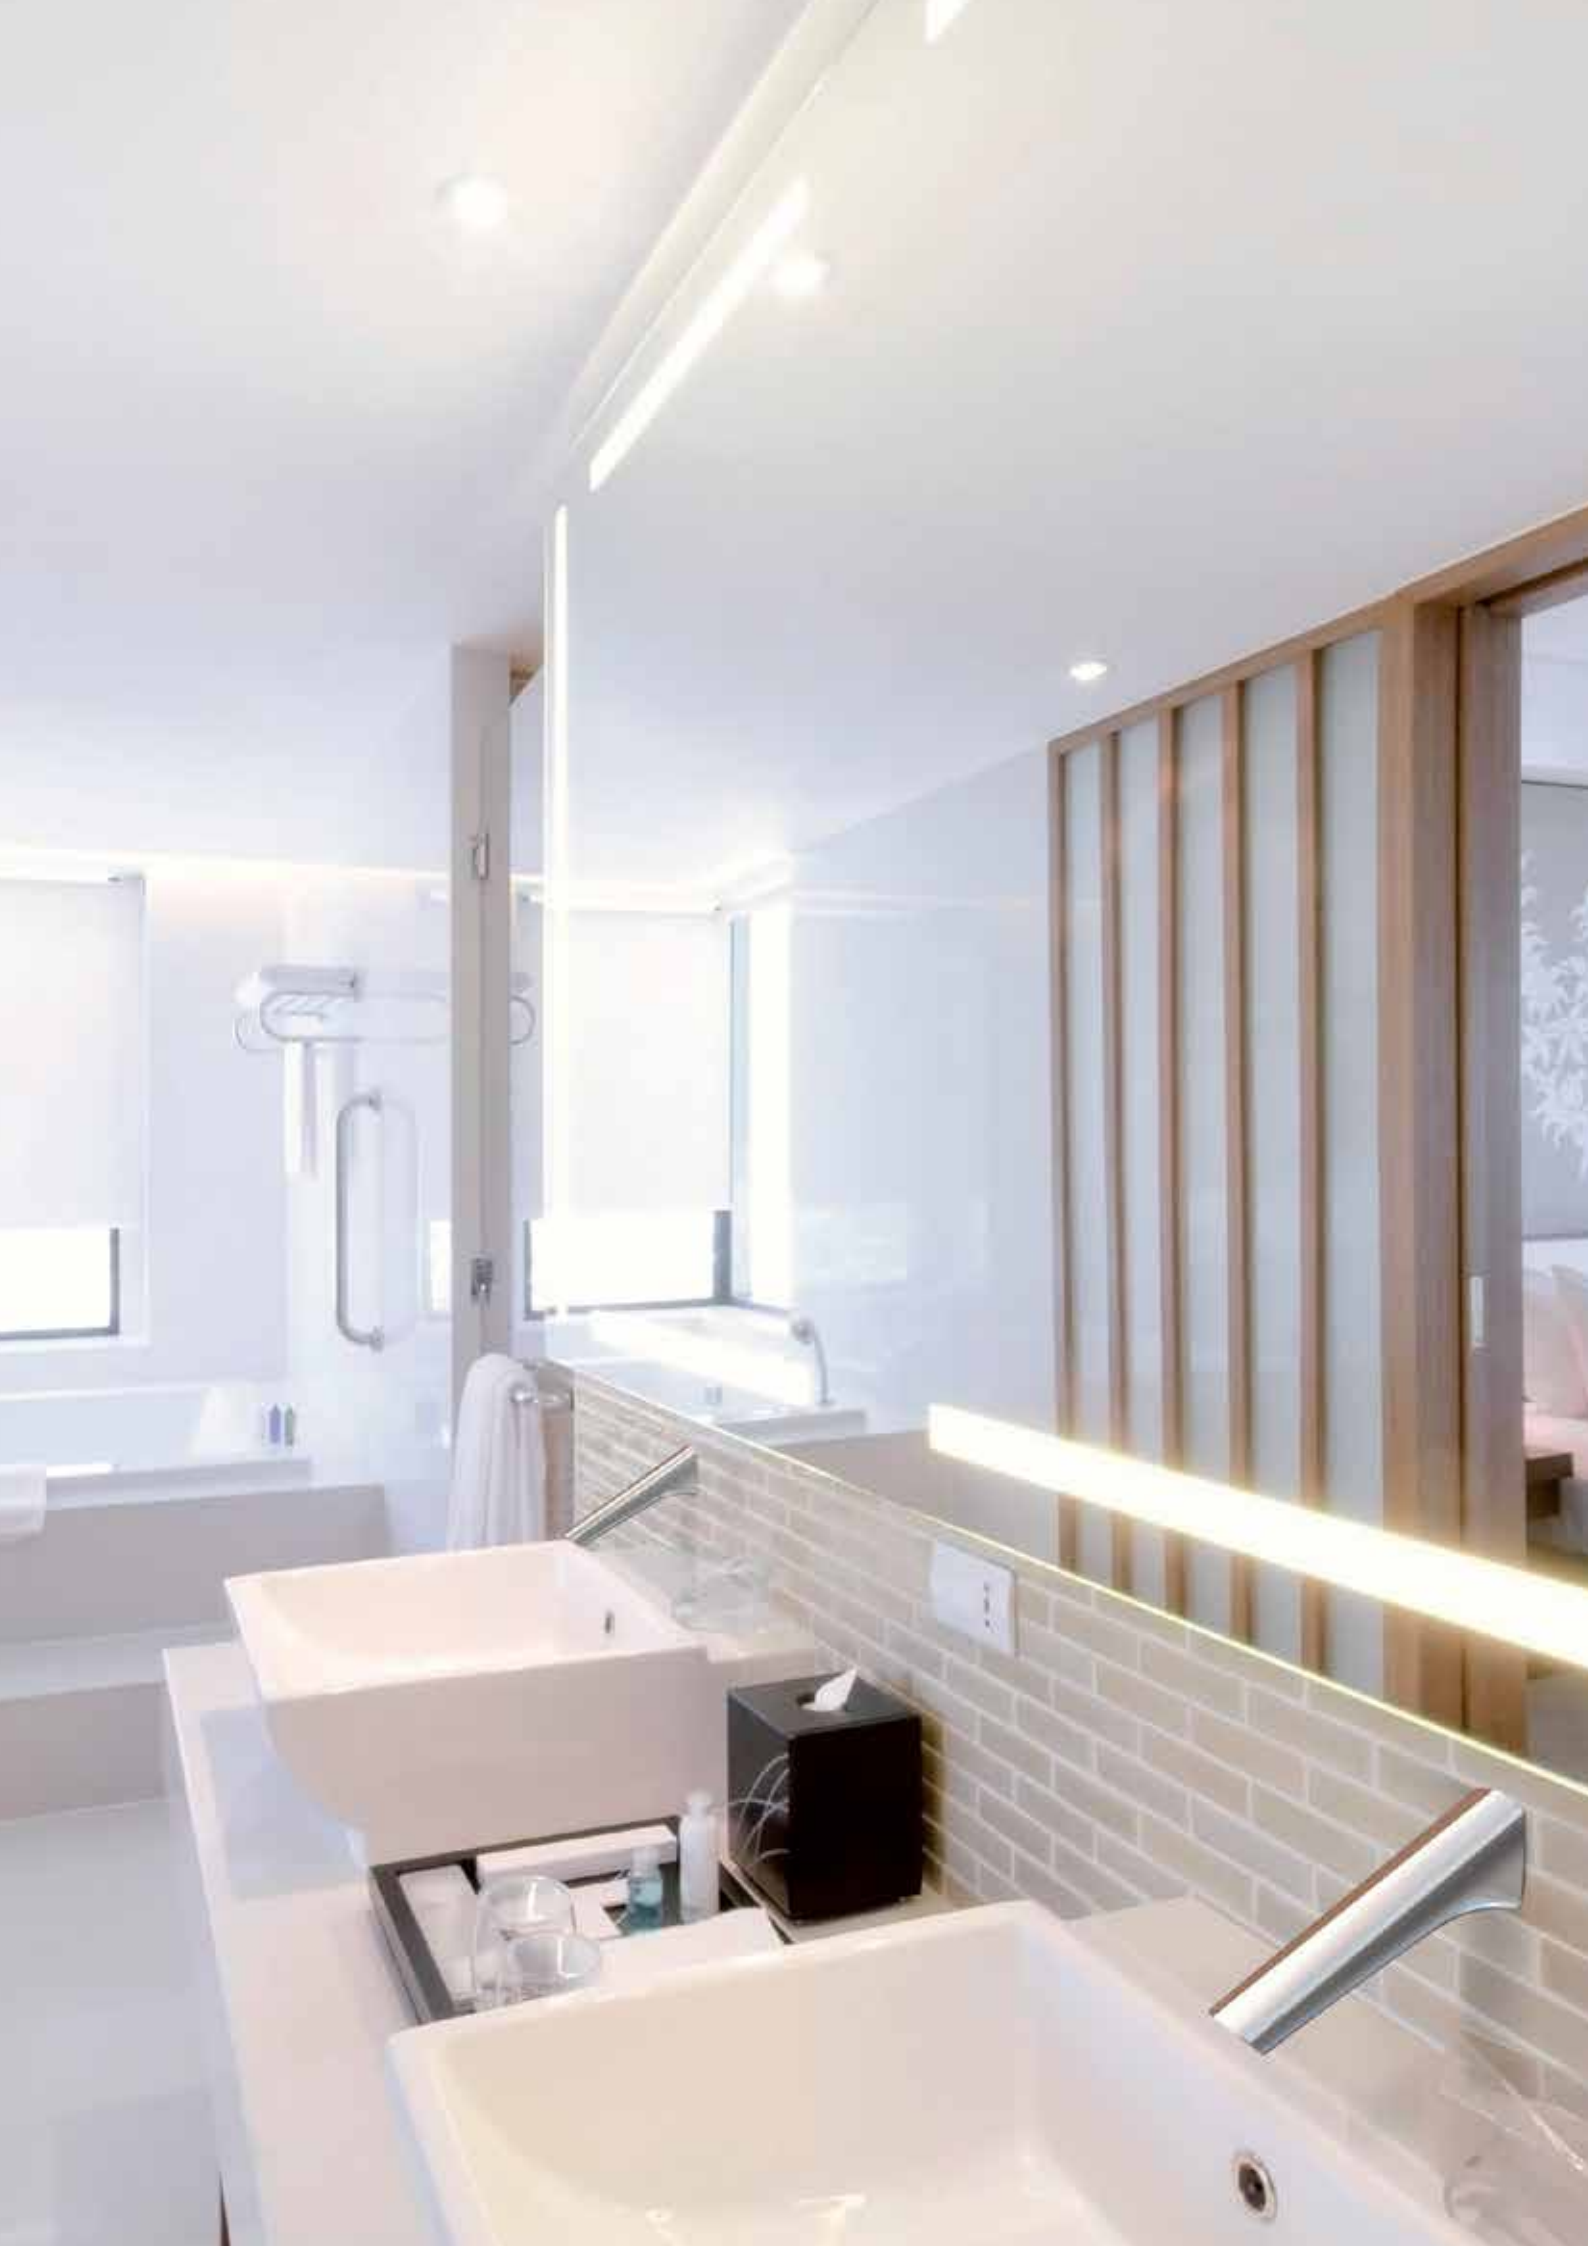



# Individuality

## The Models

The ultra faucet is available in three sizes with or without mixer and with or without drain. Each model is ready for wireless and cable data exchange.

The wall model for use in the medical field or when installation on a sink deck is not desired.



GS20  
Overall height: 123 mm  
Outlet height: 51 mm



GM20  
Overall height: 178 mm  
Outlet height: 94 mm



GH20  
Overall height: 252 mm  
Outlet height: 162 mm



GW20  
Overall length: 240 mm  
Outlet height: free

## The Electronic Modules

ultra can be equipped and converted at any time with three different electronic modules, whether it be for hygienically sensitive areas or those at risk of vandalism. It offers the right solution for any environment and any application.



Public  
The standard for public areas. A clear, rounded electronics module..



Public Solar  
Energy from the solar cells extends the battery life.



Expert Solar  
Solar cells and display of water temperature and running time.

## The Energy Options

Four energy options appropriate for any washroom: Mains, battery, and solar operation as well as turbine-operation.



Battery/Mains Operation  
Four alkaline cells cover the electricity requirement or provide optional backup in the case of mains operation.



Solar  
Solar energy extends the battery life to up to 8 years.



Turbine  
The energy generated by the turbine extends the battery life to up to 8 years.

## Variety of Spray Insert Options

Individual aerator: Flow rates of 6 l/min down to a water-conserving 2 l/min with three different jet patterns



2 l/min Multi-laminar Spray  ✓✓✓



6 l/min Full Stream Aerated




6 l/min Full Stream Laminar




**SENZO**  
wash basin faucet, with IR sensor, electronic temperature control, chrome comfort water saving jet, mains  
height: 163 mm, spout projection: 176 mm




**Twist**   
wash basin faucet, with IR sensor, electronic temperature control, chrome, mains  
height: 205 mm, spout projection: 122 mm




**lumino L10i**   
wash basin faucet, with IR sensor, temperature control, chrome, integr.temperature display with illuminated ring, mains  
height: 133 mm, spout projection: 110 mm



**lino L20**   
wash basin faucet, with IR sensor, chrome, batt/mains/VARIOconnect  
height: 133 mm, spout projection: 110 mm



**IQ A20**   
wash basin faucet, with IR sensor, chrome batt/mains/VARIOconnect  
height: 186 mm, spout projection: 142 mm



**umaxx M21**  
wash basin faucet, with IR sensor, chrome, batt/mains/VARIOconnect  
height: 124 mm, spout projection : 89 mm




**ruby MX20**  
wash basin faucet,with IR Sensor,Chrome, batt/mains/VARIOconnect  
height: 131 mm




**pelicano F20**  
wash basin faucet, with IR sensor,chrome, batt/mains/VARIOconnect  
height: 188 mm, spout projection: 149 mm



**flamingo S20**   
wash basin faucet, with IR sensor, chrome, batt/mains  
height: 166 mm, spout projection: 134 mm



**lino WV20**   
faucet for concealed wall mounting, with IR sensor, chrome, batt/VARIOconnect  
spout projection: 120 mm, 170 mm, 220 mm



**lino W45**  
exposed wall mount mixer, with IR sensor, touch free start/stop function, thermostat-cartridge, batt  
spout projection : 200 mm, 260 mm




**hybrid H10**  
kitchen faucet, single lever mixer and IR sensor, chrome, batt/mains/VARIOconnect  
height: 375 mm, spout projection: 215 mm

**Conti faucets with VARIOconnect concealed power installation**

**Single installation**

Mains power supply 6V (1 pce. per faucet)

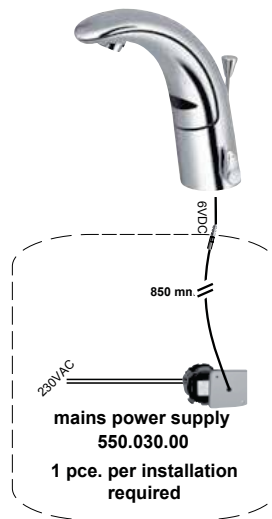

**Multiple installation**

Mains power supply 12V (12 up to 30 faucets) with power splitter (1 pce. per faucet)



## Competence in Technology and Design

---

The guiding principle of Conti + products over a decade: create ecological water saving products, that provide user benefit through simplicity of use and added hygiene. Longterm experience in water saving and water management are consequently implemented on sanitary solutions. Modern design, reliability, ease of use, easy installation and servicing are crucial claims.

Conti + is known for driving innovation by applying new and proven technologies to improve overall hygiene, save water and energy. Therefore Conti + is a leading brand for electronic sanitary products.

 Swiss Quality

Novatec Sanitaryware Lanka (Pvt) Ltd.  
No 9 , Chilaw Road  
Negombo, SriLanka  
Phone +94 31 2228223  
Fax +94 31 2223535  
info@novateclanka.com  
www.novateclanka.com

Sanieuro Sdn Bhd  
Lot G-2-10,Jalan 9,Connaught Avenue,  
Taman Bukit Cheras,56000 Kuala Lumpur  
Phone +603 9108 2199  
Fax +603 9108 3199  
sales@sanieuro.com  
www.sanieuro.com

---

Novatec Myanmar Co.,Ltd.  
No 615-C-1,Pyay Road,  
Kamayut Township, Mayangone Yangon Union of Myanmar  
Phone +959 5018057  
Fax +959 5008739  
sales@novatecmyanmar.com  
www.novatecmyanmar.com

---

Novatec Sanitaryware Co.,Ltd.  
343/25-26 Thanon Klong Lam-Jiag  
Nuanchan, Buengkum Bangkok 10230,Thailand  
Phone +602 105 3401  
Fax +602 105 3400  
sales@novatecsanitaryware.com  
www.novatecsanitaryware.com